

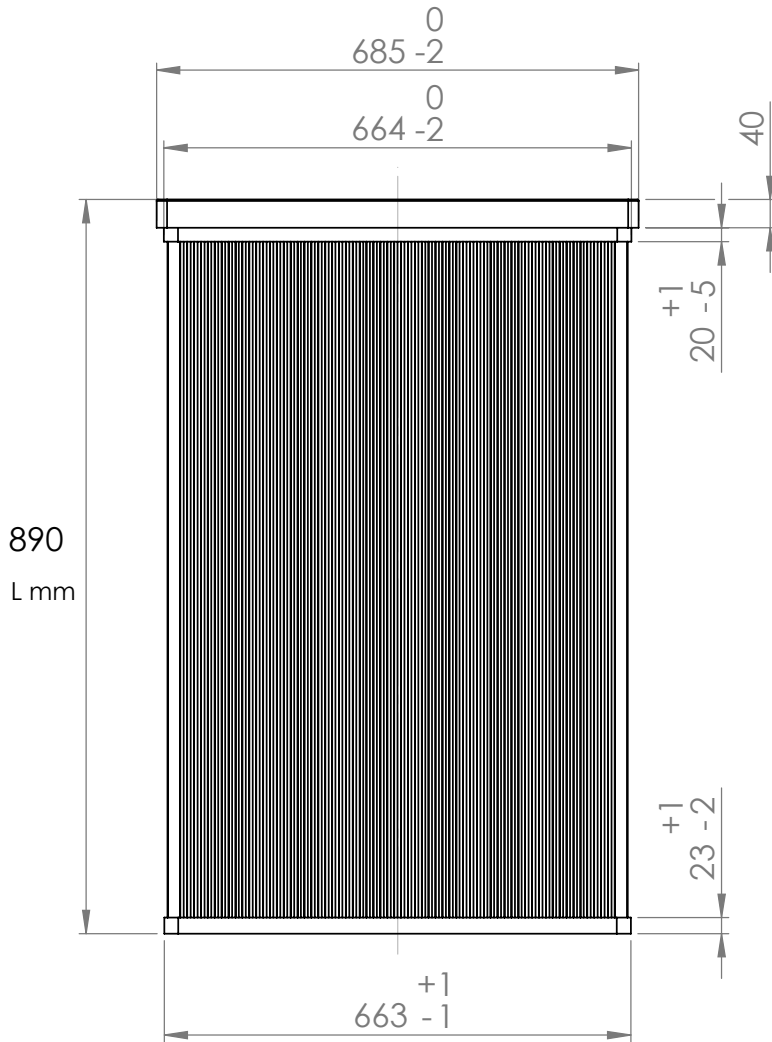


view bottom


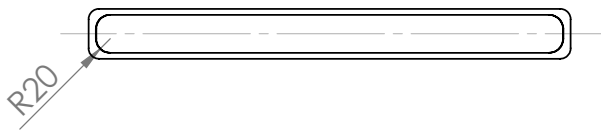


MERV Rating = 16/18 (F9/H13), 63 pleats, aprox 26 mm Pleat Height, Hard PU top and bottom, and gasket included.

It is recommended that the compressed air for the cleaning/purge cycle be set at an operating range of 4 to 5 bar, 5 bar being the MAXIMUM.

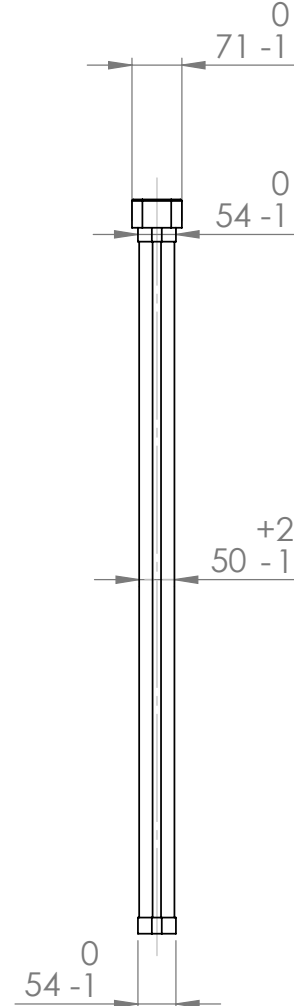

view top

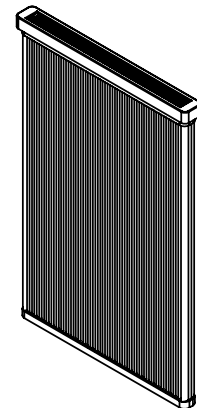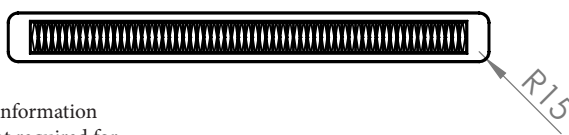

NOTES:

1. Dimensions are for information purposes only & are not required for inspection purposes.

2. ALL DIMENSIONS ARE IN mm



THIS DOCUMENT IS THE PROPERTY OF RICHARDSON ELECTRONICS, LTD. AND SHALL NOT BE COPIED REPRODUCED, USED IN THE MANUFACTURE OR SALE OF APPARATUS OR DISCLOSED TO OTHERS WITHOUT PERMISSION.

Richardson Electronics, Ltd.
40W267 Keslinger Road
LaFox, IL 60147 USA

rellaser.com | laser@rell.com
1.800.348.5580 (USA & Canada)
1.630.208.2200 (International)